


LLDPE Tubing - 220 Series
Linear low density food grade polyethylene tubing

LLDPE Tubing - 221 Series
Linear low density industrial grade polyethylene tubing

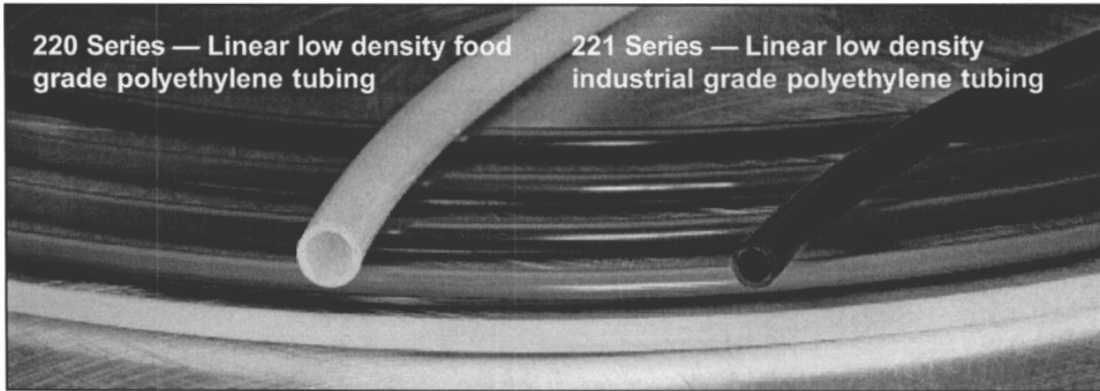

Construction:

220 Series

- Linear low density polyethylene tubing natural color - food grade

Features:

- Economical and lightweight
- LLDPE resin provides excellent environmental stress crack resistance
- Natural color
- Excellent resistance to solvents
- Chemically inert

Applications:

- Transfer of air and liquids in industrial applications
- Water lines
- Water softener lines
- Pneumatic logic control lines
- Vending equipment

Series A9350

- Linear low density polyethylene tubing - black color

Features:

- Economical and lightweight
- LLDPE resin provides excellent environmental stress crack resistance
- Resistant to sunlight and other forms of ultra-violet radiation
- Excellent resistance to solvents
- Chemically inert

Applications:

- Transfer of air and liquids in industrial applications
- Humidifier fill lines
- For outdoor uses where exposure to sunlight occurs
- Air conditioning drain lines
- Instrument air lines

The following colors are available on special order:
 2231-Yellow, 2232-Orange, 2234-Red, 2236-blue, 2237-Green

Service Temperature Range: +30 °F (-435°C) to +1250°F (+65°C)

220 Series - LLDPE Polyethylene tubing - food grade - natural color

Series No.	Series Code	Nominal ID		Nominal ID		Nominal ID		Max. Working* Pressure (PSI)		Standard Lengths		Approx. Wt. per Pkg.
		(In)	(mm)	(In)	(mm)	(In)	(mm)	@70°F (20°C)	@70°F (20°C)	Spool/Coil	Pkg.	
220	0440x2K	1/4	6.4	.170	4.3	.040	1.0	140	60	2000 ft.	Spool	22 lbs.
220	0440x500	1/4	6.4	.170	4.3	.040	1.0	140	60	500 ft.	Spool	6 lbs.
220	0440x100	1/4	6.4	.170	4.3	.040	1.0	140	60	100 ft.	Coil	1 lbs.
220	0462x2K	1/4	6.4	.125	3.1	.062	1.6	150	75	2000 ft.	Spool	30 lbs.
220	0562x15C	5/16	7.9	.178	4.8	.062	1.6	150	75	1500 ft.	Spool	30 lbs.
220	0662x1K	3/8	9.5	.250	6.4	.062	1.6	125	50	1000 ft.	Spool	25 lbs.
220	0662x500	3/8	9.5	.250	6.4	.062	1.6	125	50	500 ft.	Spool	13 lbs.
220	0662x100	3/8	9.5	.250	6.4	.062	1.6	125	50	100 ft.	Coil	3 lbs.
220	0862x500	1/2	12.7	.375	9.5	.062	1.6	100	35	500 ft.	Spool	18 lbs.
220	1062x500	5/8	15.9	.500	12.7	.062	1.6	75	25	500 ft.	Coil	23 lbs.

221 Series - LLDPE Polyethylene tubing- industrial grade - black color

221	0440x2K	1/4	6.4	.170	4.3	.040	1.0	140	60	2000 ft.	Spool	22 lbs.
221	0462x2K	1/4	6.4	.125	3.1	.062	1.6	150	75	2000 ft.	Spool	30 lbs.
221	0562x15C	5/16	7.9	.188	4.8	.062	1.6	150	75	1500 ft.	Spool	30 lbs.
221	0662x1K	3/8	9.5	.250	6.4	.062	1.6	125	50	1000 ft.	Spool	25 lbs.
221	0862x500	1/2	12.7	.375	9.5	.062	1.6	100	35	500 ft.	Spool	18 lbs.
221	1062x500	5/8	15.9	.500	12.7	.062	1.6	75	25	500 ft.	Coil	23 lbs.

* Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures. Compatible with popular spray fittings, such as Binks and DeVibiss.

**Caution: This product is designed to dissipate static electricity when the metal wire is properly grounded through the fitting or by other means. BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.

